


NAMUR pilot valve "2EV"

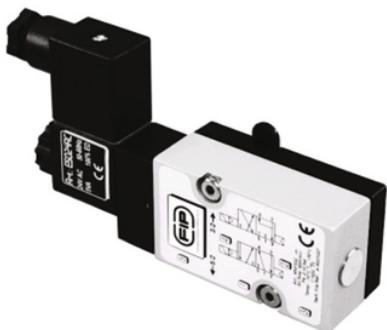

Objednací číslo	Materiál	Kategorie	product.detail.attribute.To be used with:	product.detail.attribute.Voltage
2EV024AC	FLS Measurement Instrumentation	Příslušenství pro pohonované armatury	VKD, VXE, TKD, FE, FK	24V AC
2EV024DC	FLS Measurement Instrumentation	Příslušenství pro pohonované armatury	VKD, VXE, TKD, FE, FK	24V DC
2EV110AC	FLS Measurement Instrumentation	Příslušenství pro pohonované armatury	VKD, VXE, TKD, FE, FK	110V AC
2EV220AC	FLS Measurement Instrumentation	Příslušenství pro pohonované armatury	VKD, VXE, TKD, FE, FK	220V AC

NAMUR pilot valve "2EV"

- Upper part (PVC-U)
 - Bottom part (PVC-U)
 - Bolts (zinc plated steel)
 - Nuts (zinc plated steel)
 - Gasket (NBR)
 - Reinforcing ring (Stainless steel)
- The reinforcing bush are used to reinforce the pipe PE100 (SDR11) e PE-X, to elong the lifetime of the pipeline and to reduce the collapse risk of the pipe in disadvantages conditions. They use is particurally suggested using PE-X pipes. The two tightening keys (d.16-63 and d.75-110) are important tools to install the **MAGNUM 3G** fittings