


# Power Quick/CE

The valve can be equipped with electric actuators, using the PP-GR module reproducing the drilling pattern foreseen by ISO 5211



Objednáací číslo	d	DN	product.detail.attribute.B[5:2]	Balení ks	product.detail.attribute.T	product.detail.attribute.p x j	product.detail.attribute.x J
PQCE020	20	15	58	14	16	F03 x 5,5	F04 x 5,5
PQCE025	25	20	69	14	16	*F03 x 5,5	F05 x 6,5
PQCE025F04	25	20	-	-	-	-	-
PQCE032	32	25	74	14	16	*F03 x 5,5	F05 x 6,5
PQCE032F04	32	25	-	-	-	-	-
PQCE040	40	32	91	14	16	F05 x 6,5	F07 x 8,5
PQCE050	50	40	97	14	16	F05 x 6,5	F07 x 8,5
PQCE063	63	50	114	14	16	F05 x 6,5	F07 x 8,5

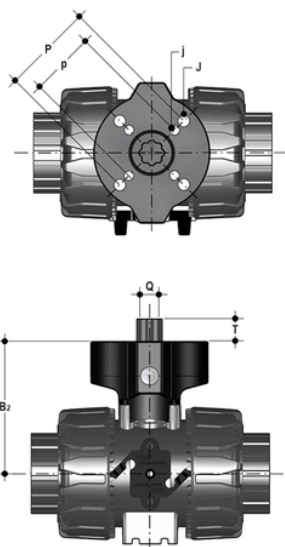

## Power Quick/CE

- Upper part (PVC-U)
  - Bottom part (PVC-U)
  - Bolts (zinc plated steel)
  - Nuts (zinc plated steel )
  - Gasket (NBR)
  - Reinforcing ring (Stainless steel)
- The reinforcing bush are used to reinforce the pipe PE100 (SDR11) e PE-X, to elong the lifetime of the pipeline and to reduce the collapse risk of the pipe in disadvantages conditions. They use is particularly suggested using PE-X pipes. The two tightening keys (d.16-63 and d.75-110) are important tools to install the **MAGNUM 3G** fittings