


SXENC – EASYFIT TRUE UNION SPRING CHECK VALVE

Easyfit ball check valve with female ends, NPT thread

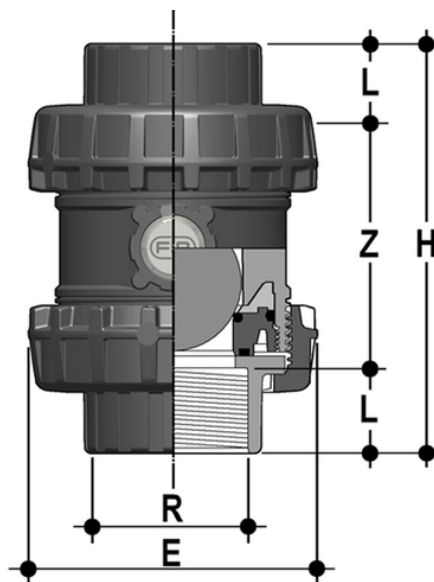

EPDM

Objednací číslo	product.detail.attribute.R	DN	PN	E	H	L	Z	g
SXENC212E	2" 1/2	65	16	157	211	33,2	144,6	2839
SXENC300E	3"	80	16	174	248	35,5	177	3597
SXENC400E	4"	100	16	212	283	37,6	207,8	6289

FKM

Objednací číslo	product.detail.attribute.R	DN	PN	E	H	L	Z	g
SXENC212F	2" 1/2	65	16	157	211	33,2	144,6	2839
SXENC300F	3"	80	16	174	248	35,5	177	3597
SXENC400F	4"	100	16	212	283	37,6	207,8	6289

SXENC – EASYFIT TRUE UNION SPRING CHECK VALVE

- **Customisable Labelling System: built-in LCE module** on the valve body made up of transparent protection plug and customisable tag holder using the LSE set (available as accessory). The customisation potential **lets you identify the valve on the system** according to specific needs
- **Locked ball seat carrier** safe dismounting for maintenance with the Easyfit multifunctional handle
- Ideal for **horizontal installations**: perfect seal even with low back pressure. Silent and durable even with strong vibrations and pulsating fluid
- PVC-U shutter and springs available in STAINLESS Steel 316, A316 PTFE encapsulated: maximum reliability in a wide field of applications from salt water to aggressive acids
- Connection system for solvent weld and threaded joints
- Valve material compatibility (**PVC-C**) **with water conveyance, drinking water and other food substances according to** current regulations
- **PN16 True Union valve body** made for PVC-C injection moulding and European Directive 2014/68/EU (PED) compliant for pressurised equipment. ISO 9393 compliant test requirements
- Easy radial disassembly and fully interchangeable with VXE 65-100 valve models
- Union nut profile that perfectly adapts to the Easyfit multifunctional handle hooked insert (available as an accessory) that lets you control union nut rotation
- Can be **installed** in either a **vertical** or **horizontal** position