


FKOC/RM – BUTTERFLY VALVE

Gearbox operated Butterfly valve

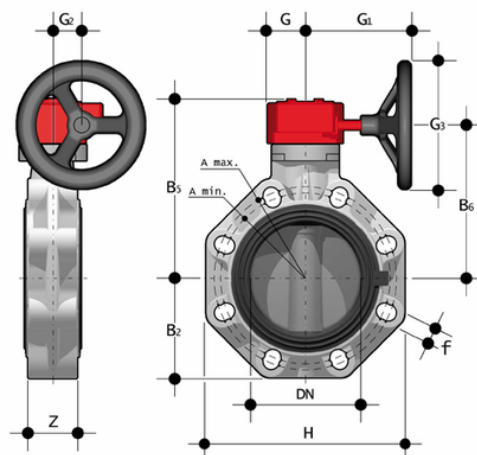

EPDM

Objednací číslo	product.detail.attribute.d – Size	DN	PN	product.detail.attribute.A min	product.detail.attribute.A max	product.detail.attribute.øA	product.detail.attribute.f
FKOCRM075E	75 – 2½"	65	10	128	144	–	80
FKOACRM810E	10"	**250	10	–	362	350	210
FKOCRM315E	315	*300	8	390	432	400	245
FKOCRM280E	280	*250	10	335	362	350	210
FKOCRM225E	225	200	10	280	298	–	161
FKOCRM160E	160 – 6"	150	10	230	242	–	134
FKOCRM140E	140 – 5½"	125	10	204	215	–	120
FKOCRM110E	110 – 4½"	100	10	165	190	–	107
FKOCRM090E	90 – 3½"	80	10	145	160	–	93
FKOACRM812E	12"	**300	8	–	431,8	450	245

FKM

Objednací číslo	product.detail.attribute.d – Size	DN	PN	product.detail.attribute.A min	product.detail.attribute.A max	product.detail.attribute.øA	product.detail.attribute.f
FKOCRM075F	75 – 2½"	65	10	128	144	–	80
FKOACRM810F	10"	**250	10	–	362	350	210
FKOCRM315F	315	*300	8	390	432	400	245

FKOC/RM – BUTTERFLY VALVE

Objednací číslo	product.detail.attribute.d – Size	DN	PN	product.detail.attribute.A min	product.detail.attribute.A max	product.detail.attribute.øA	product.detail.attribute.øB
FKOCRM280F	280	*250	10	335	362	350	210
FKOCRM225F	225	200	10	280	298	–	161
FKOCRM160F	160 – 6"	150	10	230	242	–	134
FKOCRM140F	140 – 5"	125	10	204	215	–	120
FKOCRM110F	110 – 4"	100	10	165	190	–	107
FKOCRM090F	90 – 3"	80	10	145	160	–	93
FKOACRM812F	12"	**300	8	–	431,8	400	245

FKOC/RM – BUTTERFLY VALVE

- Ergonomic handle in **HIPVC** equipped with **locking and unlocking device, release, quick operation and graduated adjustment** in 10 intermediate positions (DN 40÷200). The operating range, starting from the first few degrees of valve opening, also guarantees extremely low pressure drops.
- **Customisable Labelling System**: integrated module in the handle, made of a transparent protection plug and a customisable tag holder using the LSE set (available as an accessory). The **customisation** lets you **identify the valve on the system** according to specific needs.
- **STAINLESS steel square section stem** completely isolated from the fluid complying with standard $\text{ISO 5211: DN 40÷65: 11 mm}$ DN 80÷100: 14 mm DN 125÷150: 17 mm DN 200: 22 mm DN 250÷300: 27 mm
- **Body** in polypropylene based **compound reinforced with fibreglass (PP-GR)** **resistant to UV rays** and characterised by **high mechanical strength**.
- **Drilling pattern using oval slots** that allow coupling to flanges according to numerous international standards. The special **self-centring inserts in ABS** supplied for DN 40÷200 guarantee the **correct axial alignment** of the valve during installation. For DN 250÷400 valves, the drilling pattern for the selfcentring system is of the traditional type according to DIN and ANSI standards.
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- Interchangeable Disk in PVC-C with through shaft, available in different thermoplastic materials: PVC-U, PP-H, ABS, PVDF
- Overall dimensions of the valve in accordance with standard ISO 5752 (DN 40÷200 Medium Series 25, DN 250÷ 300 Long Series 16) and DIN 3202 K2 and ISO 5752 (DN 65÷200 K2, DN 250÷300 K3)
- Can also be installed as an end line valve, bottom discharge valve or tank dump valve
- **Special Lug version** PN 10 fully drilled to DIN 2501 or ANSI B16.5 cl.150 with **molded-in AISI 316 stainless steel threaded inserts**
- Possibility of installing a manual reducer or pneumatic and/or electric actuators by applying ISO standard drilling pattern PP-GR flanges. DN 40 ÷ 200 valve fitted with plate with rack in PP-GR. For actuated versions with flange drilled according to ISO 5211 F05, F07, F10
- DN 250÷300 valve, fitted with one-piece top flange in high mechanical strength PP-GR with mounting flange for internal components with drilling according to standard ISO 5211 F10, F12, F14
- Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations