


# S22FV – TRUE UNION 2-WAY SOLENOID VALVE

2 way solenoid valve with gas cylinder thread female union ends. Function: Normally closed

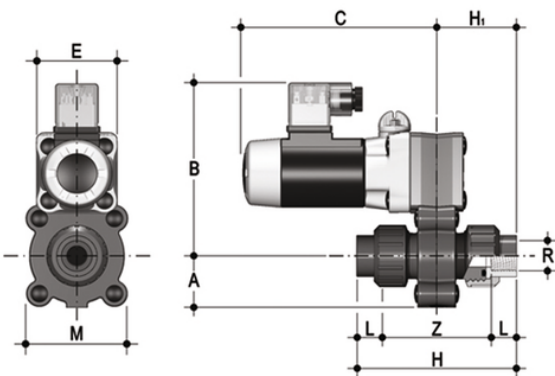

## EPDM

Objednací číslo	product.detail.attribute.R	DN	product.detail.attribute.A	B	C	H	product.detail.attribute.H1	L	Z	E	M	g
See coding table	1/2"	8-10-15	34	115	130	105	52.5	15	75	54	67	1000
See coding table	1/2"	8-10-15	34	115	130	105	52.5	15	75	54	67	1000

## S22FV – TRUE UNION 2-WAY SOLENOID VALVE

- Installation flexibility and ease of maintenance: high-performance solenoid electric actuator with internal moving parts designed to exceed 5 million maintenance free operating cycles. Adjustable circular section coil with IP65 protection class.
  - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).
  - Lever shutter in EPDM or FKM and lever in stainless steel.
  - Suitable for use with aggressive fluids: no metal component in contact with the fluid or the external environment; all the screws are covered by PE protection plugs.
  - Emergency override
- 
- 2-Way PVC-U body
  - Installation flexibility and ease of maintenance: high-performance solenoid electric actuator designed to exceed 5 million maintenance-free operating cycles
  - Adjustable circular section coil with IP65 protection class.
  - Integrated override with the possibility of being installed in 3 different positions.
  - Lever shutter in EPDM or FKM and lever in stainless steel.
  - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).