


VKDOAM – DUAL BLOCK[®] 2-way ball valve

DUAL BLOCK[®] 2-way ball valve with fixed flange, drilled ANSI B16.5 cl.150#FF

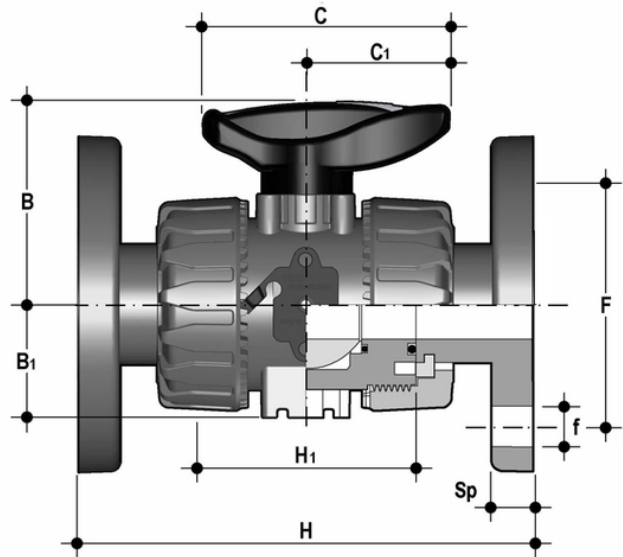

EPDM

Objednací číslo	d	DN	PN	B	B (5:1)	C	C (5:1)	product.detail.attribute.F	product.detail.attribute.f	H	H (5:1)	product.detail.attribute.Sp	produ
VKDOAM012E	1/2"	15	10	54	29	67	40	60,3	15,9	143	65	11	4
VKDOAM034E	3/4"	20	10	65	34,5	85	49	69,9	15,9	172	70	14	4
VKDOAM100E	1"	25	10	69,5	39	85	49	79,4	15,9	187	78	14	4
VKDOAM114E	1" 1/4	32	10	82,5	46	108	64	88,9	15,9	190	88	14	4
VKDOAM112E	1" 1/2	40	10	89	52	108	64	98,4	15,9	212	93	16	4
VKDOAM200E	2"	50	10	108	62	134	76	120,7	19,1	234	111	16	4

FKM

Objednací číslo	d	DN	PN	B	B (5:1)	C	C (5:1)	product.detail.attribute.F	product.detail.attribute.f	H	H (5:1)	product.detail.attribute.Sp	produ
VKDOAM012F	1/2"	15	10	54	29	67	40	60,3	15,9	143	65	11	4
VKDOAM034F	3/4"	20	10	65	34,5	85	49	69,9	15,9	172	70	14	4
VKDOAM100F	1"	25	10	69,5	39	85	49	79,4	15,9	187	78	14	4
VKDOAM114F	1" 1/4	32	10	82,5	46	108	64	88,9	15,9	190	88	14	4
VKDOAM112F	1" 1/2	40	10	89	52	108	64	98,4	15,9	212	93	16	4



VKDOAM – DUAL BLOCK[®] 2-way ball valve

Objednací číslo	d	DN	PN	B	B (5:1)	C	C (5:1)	product.detail.attribute.F	product.detail.attribute.f	H	H (5:1)	product.detail.attribute.Sp	produ
VKDOAM200F	2"	50	10	108	62	134	76	120,7	19,1	234	111	16	4

VKDOAM – DUAL BLOCK[®] 2-way ball valve

- Ergonomic HIPVC handle equipped with **removable tool to adjust the ball seat carrier**.
- **Handle lock 0°– 90°** SHKD (available as an accessory) ergonomically operable during service and padlockable
- Robust **integrated bracket for valve anchoring**, for easy and quick automation even after valve installation on the system via the Power Quick module (optional)
- **DUAL BLOCK[®]** patented lock system that ensures union nut tightening hold even in severe conditions such as vibrations or heat dilation
- Machined high surface finish ball that guarantees a smooth operation and increased reliability
- Connection system for solvent weld, threaded and flanged joints
- Patented **SEAT STOP[®]** ball carrier system that lets you micro-adjust ball seats and minimise the axial force effect
- Easy radial dismounting allowing quick replacement of O-rings and ball seats without any need for tools
- **PN16 True Union valve body** made for rigid PVC-U injection moulding equipped with built-in bores for actuation. ISO 9393 compliant test requisites
- Option of dismounting downstream pipes with the valve in the closed position
- Floating **full bore ball** with high surface finish
- **Integrated bracket** for valve anchoring
- Ball seat carriers can be adjusted using the **Easytorque adjustment kit**
- Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations